

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
24 December 2003 (24.12.2003)

PCT

(10) International Publication Number  
**WO 03/106252 A1**

(51) International Patent Classification<sup>7</sup>: **B63B 21/34**

(21) International Application Number: PCT/AU03/00800

(22) International Filing Date: 16 June 2003 (16.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
PS 3014 18 June 2002 (18.06.2002) AU

(71) Applicant and

(72) Inventor: FRANCIS, Rex, William [AU/AU]; Anchor  
Right Australia Pty Ltd, 27 Dunstan Road, Avonsleigh,  
Victoria 3782 (AU).

(74) Agent: WINCH, Jeffrey, Peter; Callinan Lawrie, 711  
High Street, Kew, Victoria 3101 (AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ANCHOR WITH SMALLER SECOND FLUKE

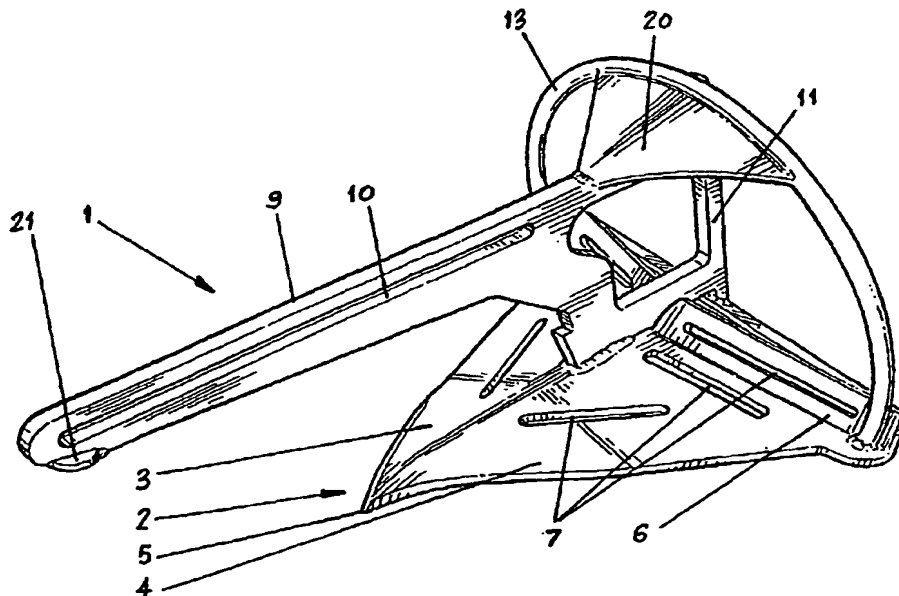

(57) Abstract: Anchor (1) of the plough type has shank (9) fixed to main triangular fluke (2) and has semi-circular hoop or bail (13) to assist in righting it should it not land upright. Attached to shank (9) and bail (13) is secondary fluke (20) that is also triangular and parallel to main fluke (2). Smaller fluke (7) enhances holding power when anchor (1) is buried deep in sand, acts to prevent mud, weeds, etc being caught on bail (13) or shank (9), and, if anchor (1) is dragged upside down, fluke (20) pushes mud forward assisting in lifting and turning anchor (1) to the correct orientation.

WO 03/106252 A1